
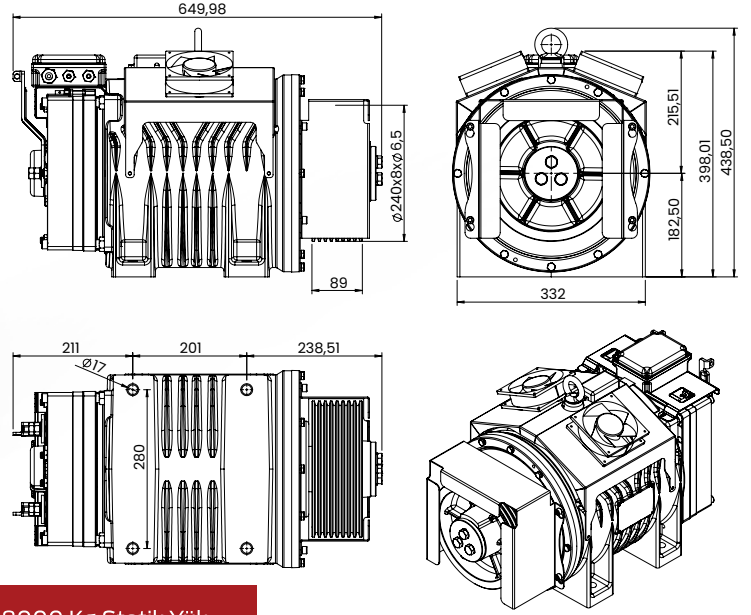


VALENTE

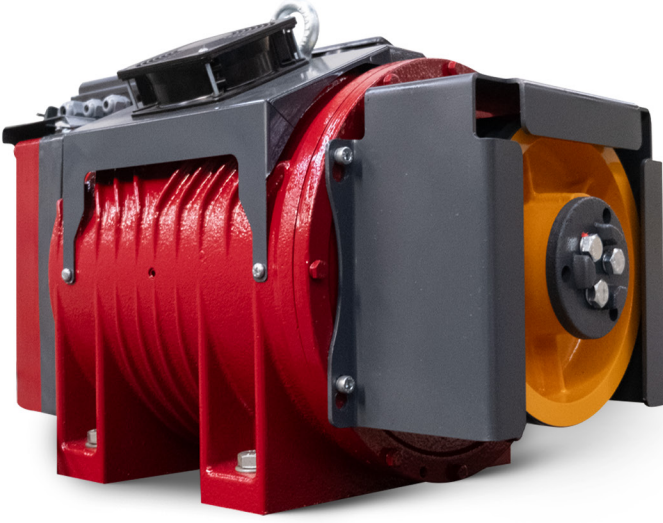

75 Metre Seyir Mesafesi

2:1 Askı

8000 Kg Statik Yük

75 Meter Cruising Range

2:1 Suspension

8000 Kg Static Load

Ürün Product	Hız (m/s) Speed(m/s)	Kapasite (Kg) Capacity(Kg)	Çıkış Gücü(kW) Power Output(kW)	Kasnak Shave(mm)	Amper(A) Current(A)	Kutup-Frekans Pole Frequency	Devir(Rpm) Revulation(Rpm)	Verim Efficiency	Tork(Nm) Torque(Nm)	Makine Ağırlığı(Kg) Machine Weight(Kg)
VLX-300	0,63	1000	3,9	210X9X6,5	11,7	20P-19.16	115	0,70	322	215
VLX-300	1,00		6,1		16,3	20P-30.32	182	0,80		
VLX-300	1,60		9,8		24,5	20P-48.50	291	0,85		
VLX-300	2,00		12,2		30,6	20P-60.63	364	0,85		
VLX-300	2,50		15,3		38,3	20P-75.83	455	0,85		
VLX-300	0,63	800	3,1	240X7X6,5	9,4	20P-16.71	100	0,70	294	
VLX-300	1,00		4,9		13,0	20P-26.53	160	0,80		
VLX-300	1,60		7,8		19,6	20P-42.44	255	0,85		
VLX-300	2,00		9,8		24,5	20P-53.05	319	0,85		
VLX-300	2,50		12,2		30,6	20P-66.31	398	0,85		
VLX-300	0,63	1000	3,9	240X8X6,5	11,7	20P-16.71	100	0,70	368	
VLX-300	1,00		6,1		16,3	20P-26.53	160	0,80		
VLX-300	1,60		9,8		24,5	20P-42.44	255	0,85		
VLX-300	2,00		12,2		30,6	20P-53.06	319	0,85		
VLX-300	2,50		15,3		38,3	20P-66.31	398	0,85		
VLX-300	0,63	800	3,1	320X5X8	10,9	20P-12.53	76	0,60	392	
VLX-300	1,00		4,9		14,9	20P-19.89	120	0,75		
VLX-300	1,60		7,8		20,8	20P-31.83	191	0,80		
VLX-300	2,00		9,8		24,5	20P-39.79	239	0,85		
VLX-300	2,50		12,2		30,6	20P-49.74	299	0,85		
VLX-300	0,63	630	2,4	320X5X8	8,6	20P-12.53	75	0,60	309	
VLX-300	1,00		3,9		11,7	20P-19.89	119	0,70		
VLX-300	1,60		6,2		16,4	20P-31.83	191	0,80		
VLX-300	2,00		7,7		19,3	20P-39.79	239	0,85		
VLX-300	2,50		9,6		24,1	20P-49.74	298	0,85		

20 Kutup
Motor Maksimum Çalışma Sıcaklığı 140°C

360V - 220V
240 St/h

Senkron Motor
Enkoder: ENDAT-SINCOS

İzolasyon Sınıfı:F
IP Sınıfı:54

20 Pole
Motor Max. Working Temperature 140°C





360V - 220V
240 St/h

Synchronous Motor
Encoder: ENDAT-SINCOS

Isolation Class:F
IP Protection:54



LEONE

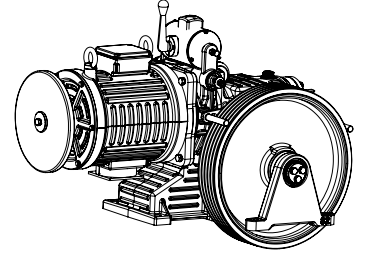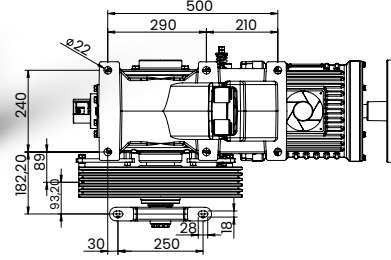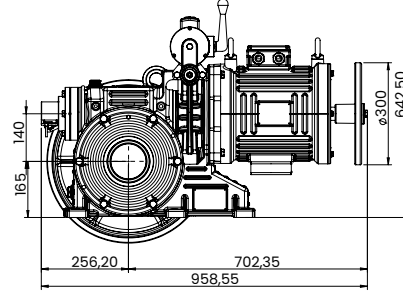

75 Metre Seyir Mesafesi

1:1 Askı

3500 Kg Statik Yük

75 Meter Cruising Range

1:1 Suspension

3500 Kg Static Load

Model Product	Hız (m/s) Speed (m/s)	Kapasite(Kg) Capacity(Kg)	Güç (kW) Power (kW)	Kasnak Shave(mm)	Amper (A) Current(A)	Tahvil Oranı Ratio	Seyir Mesafesi (m.) Cruising Distance (m.)	Makine Ağırlığı (Kg.) Machine Weigth (Kg.)
LNX-90	1,00	450	4,0 kw	480*5*10	10,5	38/1	75	305
LNX-90	1,00	630	5,5 kw	480*5*10	13,5	38/1	75	310
LNX-90	1,00	800	7,5 kw	480*5*10	17,5	38/1	75	330
LNX-90	1,60	320	4,0 kw	480*4*10	10,5	48/2	75	315
LNX-90	1,60	450	5,5 kw	480*5*10	13,5	48/2	75	310
LNX-90	1,60	630	7,5 kw	480*5*10	17,5	48/2	75	330
LNX-900	1,00	1000	7,5 kw	500*6*10	17,5	39/1	75	355
LNX-900	1,00	1125	9,0 kw	500*6*10	21,0	39/1	75	365
LNX-900	1,00	1440	11,0 kw	500*7*10	23,0	39/1	75	385
LNX-900	1,20	600	5,5 kw	620*5*10	13,5	39/1	75	365
LNX-900	1,20	800	7,5 kw	620*6*10	17,5	39/1	75	370
LNX-900	1,20	960	9,0 kw	620*6*10	21,0	39/1	75	380
LNX-900	1,20	1125	11,0 kw	620*6*10	23,0	39/1	75	395
LNX-900	1,60	500	5,5 kw	500*5*10	13,5	49/2	75	365
LNX-900	1,60	680	7,5 kw	500*5*10	17,5	49/2	75	370
LNX-900	1,60	800	9,0 kw	500*5*10	21,0	49/2	75	365
LNX-900	1,60	1000	11,0 kw	500*6*10	23,0	49/2	75	385
LNX-900	2,00	400	5,5 kw	620*4*10	13,5	49/2	75	365
LNX-900	2,00	550	7,5 kw	620*5*10	17,5	49/2	75	370
LNX-900	2,00	630	9,0 kw	620*5*10	21,0	49/2	75	380
LNX-900	2,00	800	11,0 kw	620*6*10	23,0	49/2	75	395
LNX-900	2,40	320	5,5 kw	500*4*10	13,5	46/3	75	340
LNX-900	2,40	400	7,5 kw	500*5*10	17,5	46/3	75	355
LNX-900	2,40	525	9,0 kw	500*5*10	21,0	46/3	75	365
LNX-900	2,40	640	11,0 kw	500*5*10	23,0	46/3	75	385
LNX-900	3,20	320	7,5 kw	620*4*10	17,5	46/3	75	370
LNX-900	3,20	450	9,0 kw	620*4*10	21,0	46/3	75	380
LNX-900	3,20	525	11,0 kw	620*5*10	23,0	46/3	75	395

4 Kutup
Motor Maksimum Çalışma Sıcaklığı 140°C

Asenkron Motor
240 St/h

İzolasyon Sınıfı:F
Enkoder: Artımsal

IP Sınıfı:21

4 Pole
Motor Max. Working Temperature 140°C

Asynchronous Motor
240 St/h

Isolation Class:F
Encoder: Incremental

IP Protection:21

